

3456 // GREEN BARRIER CUT D

Chemical protective gloves
PPE risk category III



Very good dry and oil grip
High cut resistance (D)
Perfect for working with small parts




3456 // GREEN BARRIER CUT D



Material:	Special yarn, neon yellow
Coating:	Nitrile, petrol Nitrile, sanded, petrol
Size(s):	8-12
Packaging unit:	72 pair(s)
Certification:	EN 388, EN ISO 374, EN 407

NITRAS GREEN BARRIER CUT D, chemical protective gloves, special yarn (HPPE / polyester / glass fibre / polyamide / elastane), neon yellow, double layer coating, lower coating: nitrile, petrol, fully coated, upper coating: nitrile, sanded, petrol (colour code: 2500), partly coated on palm and fingertips, length 33 cm, thickness approx. 1.9 mm, very good dry and oil grip, protection against micro-organisms and bacteria, high cut resistance, for food contact, premium quality, particularly sensitive, perfect for working with small parts, very good tactile sensitivity, very good dexterity, protection against contact heat (100° C, 15 seconds), very slip resistant, very high abrasion resistance, very robust and resistant, pairwise per polybag, PPE risk category III

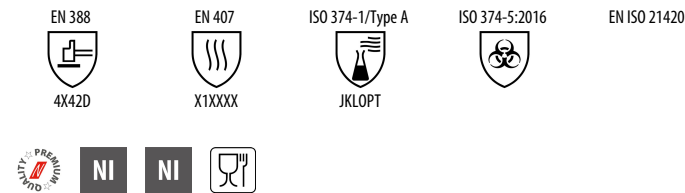

Industries

-  Building / Construction
-  Cleaning / Facility management
-  Food industry
-  Landscape gardening
-  Waste management
-  Chemistry / laboratory

Advantages

- + Very good dry and oil grip
- + High cut resistance (D)
- + Perfect for working with small parts



Performance values

EN 388:2016 + A1:2018	Test parameter	Performance levels	Test result
 4X42D	Abrasion resistance	1-4	4
	Blade cut resistance (Coupe test)	1-5	X
	Tear resistance	1-4	4
	Puncture resistance	1-4	2
	Blade cut resistance (TDM)	A-F	D
EN 407:2020	Test parameter	Performance levels	Test result
 X1XXXX	Resistance to flammability	1-4	X
	Contact heat resistance	1-4	1
	Convective heat resistance	1-4	X
	Radiant heat resistance	1-4	X
	Resistance to small splashes of molten metal	1-4	X
	Resistance to large quantities of molten metal	1-4	X
EN ISO 374-1:2016 + A1:2018	Test parameter	Performance levels	Test result
 JKLOPT	J - n-Heptane	1-6	4 (> 120)
	K - Sodium hydroxide 40%	1-6	6 (> 480)
	L - Sulphuric acid 96%	1-6	4 (> 120)
	O - Ammonia water 25%	1-6	3 (> 60)
	P - Hydrogen peroxide 30%	1-6	6 (> 480)
	T - Formaldehyde 37%	1-6	6 (> 480)
EN ISO 374-5:2016	Test parameter	Performance levels	Test result
	Penetration	-	Passed
	Protection against viruses	-	-
EN ISO 21420:2020	Test parameter	Performance levels	Test result
	Dexterity	1-5	5

Additional information

	Material	Colour
Palm	Nitrile	petrol
Index finger and thumb	Nitrile	petrol
Back of the hand	Nitrile	petrol
Fingertips	Nitrile	petrol
Cuff / knitted wrist	Nitrile	petrol

Thickness (approx.)

Finger	1,9 mm
Palm	1,9 mm
Cuff	1,9 mm

Logistics data

Size	GTIN (SPU)	GTIN (PU)	Length (m)	Width (m)	Height (m)	Weight (kg)	Quantity PU / pallet
8	4059904214026	4059904214071	0,46 m	0,37 m	0,24 m	8,5 kg	30
9	4059904214033	4059904214088	0,46 m	0,37 m	0,24 m	8,5 kg	30
10	4059904214040	4059904214095	0,46 m	0,37 m	0,24 m	8,5 kg	30
11	4059904214057	4059904214101	0,48 m	0,32 m	0,3 m	10,5 kg	30
12	4059904214064	4059904214118	0,46 m	0,37 m	0,24 m	8,5 kg	30

Customs tariff number: 61161020910

Country of origin: China