

# 8330 // TOUGH GRIP N

Disposable gloves  
PPE risk category III



Very good tactile sensitivity  
Very good dry and oil grip  
Very robust and resistant




## 8330 // TOUGH GRIP N



|                        |                    |
|------------------------|--------------------|
| <b>Material:</b>       | Nitrile, black     |
| <b>Coating:</b>        | -                  |
| <b>Size(s):</b>        | S-2XL              |
| <b>Packaging unit:</b> | 10 piece(s)        |
| <b>Certification:</b>  | EN 388, EN ISO 374 |

NITRAS TOUGH GRIP N, nitrile disposable gloves, black (colour code: 1000), non-sterile, rolled edge, powder free, innovative scale surface for perfect grip on wet and dry surfaces, perfect fit, very robust, for food contact, ambidextrous (left and right hand), colour code system for sizes, AQL 1.5, protection against micro-organisms, bacteria and viruses, premium quality, box per 50 pieces, particularly sensitive, perfect for working with small parts, very good tactile sensitivity, very good dry and oil grip, very robust and resistant, PPE risk category III




### Industries

-  Craft
-  Building / Construction
-  Automotive manufacturing
-  Food industry
-  Chemistry / laboratory

### Advantages

- + Very good tactile sensitivity
- + Very good dry and oil grip
- + Very robust and resistant

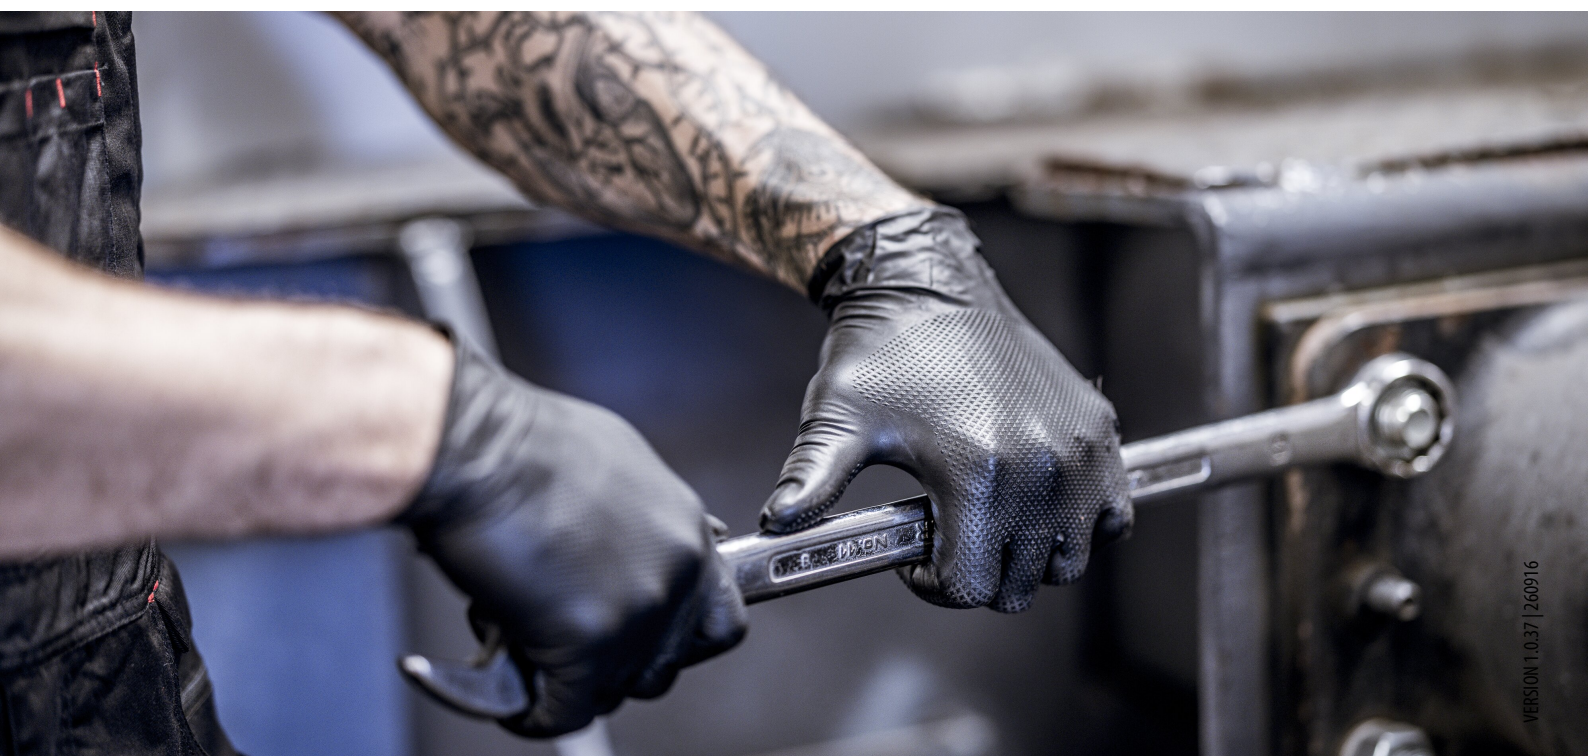

Further images

---



Colour variants

---



**8330 // TOUGH GRIP N**  
Colour code: 1000



**8335 // TOUGH GRIP N**  
Colour code: 4400



**8340 // TOUGH GRIP N 300**  
Colour code: 2200

## Performance values

| EN 388:2016 + A1:2018                                                                        | Test parameter                    | Performance levels | Test result |
|----------------------------------------------------------------------------------------------|-----------------------------------|--------------------|-------------|
| <br>1000X   | Abrasion resistance               | 1-4                | 1           |
|                                                                                              | Blade cut resistance (Coupe test) | 1-5                | 0           |
|                                                                                              | Tear resistance                   | 1-4                | 0           |
|                                                                                              | Puncture resistance               | 1-4                | 0           |
|                                                                                              | Blade cut resistance (TDM)        | A-F                | X           |
| EN ISO 374-1:2016 + A1:2018                                                                  | Test parameter                    | Performance levels | Test result |
| <br>JKOPST  | J - n-Heptane                     | 1-6                | 3 (> 60)    |
|                                                                                              | K - Sodium hydroxide 40%          | 1-6                | 6 (> 480)   |
|                                                                                              | L - Sulphuric acid 96%            | 1-6                | 1 (> 10)    |
|                                                                                              | O - Ammonia water 25%             | 1-6                | 3 (> 60)    |
|                                                                                              | P - Hydrogen peroxide 30%         | 1-6                | 6 (> 480)   |
|                                                                                              | S - Hydrofluoric acid 40%         | 1-6                | 2 (> 30)    |
|                                                                                              | T - Formaldehyde 37%              | 1-6                | 6 (> 480)   |
| EN ISO 374-5:2016                                                                            | Test parameter                    | Performance levels | Test result |
| <br>VIRUS | Penetration                       | -                  | Passed      |
|                                                                                              | Protection against viruses        | -                  | Passed      |
| EN ISO 21420:2020                                                                            | Test parameter                    | Performance levels | Test result |
|                                                                                              | Dexterity                         | 1-5                | 5           |

## Additional information

|                        | Material | Colour |
|------------------------|----------|--------|
| Palm                   | Nitrile  | black  |
| Index finger and thumb | Nitrile  | black  |
| Back of the hand       | Nitrile  | black  |
| Fingertips             | Nitrile  | black  |
| Cuff / knitted wrist   | Nitrile  | black  |

## Thickness (approx.)

|        |         |
|--------|---------|
| Finger | 0,26 mm |
| Palm   | 0,2 mm  |
| Cuff   | 0,2 mm  |

## Logistics data

| Size | GTIN (SPU)    | GTIN (PU)     | Length (m) | Width (m) | Height (m) | Weight (kg) | Quantity PU / pallet |
|------|---------------|---------------|------------|-----------|------------|-------------|----------------------|
| S    | 4059904041158 | 4059904009608 | 0,27 m     | 0,27 m    | 0,25 m     | 4,7 kg      | 54                   |
| M    | 4059904041165 | 4059904009615 | 0,28 m     | 0,27 m    | 0,25 m     | 5,3 kg      | 54                   |
| L    | 4059904041172 | 4059904009622 | 0,28 m     | 0,27 m    | 0,25 m     | 5,6 kg      | 54                   |
| XL   | 4059904041189 | 4059904009639 | 0,28 m     | 0,27 m    | 0,26 m     | 6,2 kg      | 54                   |
| 2XL  | 4059904041196 | 4059904009646 | 0,29 m     | 0,26 m    | 0,26 m     | 6,7 kg      | 54                   |

Customs tariff number: 40151900000

Country of origin: Thailand